

NoCut® pad

- Very low dead weight
- Flexible fabric construction
- Unique ribbed structure enables raising of sharp loads
- High operational safety due to tested quality
- High cut resistance
- Sewn label with handling instructions



NoCut® pad



NoCut® pad – protective plates against the „sharp edge“

NoCut® pad for round slings and flat slings is the combination of NoCut® sleeve with an internal fabric bridge that has fastening elements (see table) on both ends. NoCut® pad is mounted there where the lifting gear lies flat against the sharp edge. For the user this means: High flexibility, low material requirement and high safety when handling sharp-edged loads! The size of the edge protection can be exactly dimensioned for the danger area and precisely positioned on the sharp edge.

Multiple layers against sharp edges
NoCut® pad is offered as a 2-layer or 4-layer version. This multilayer design achieves an extremely high level of cut protection and offers the user many options, also for critical lifting procedures. Even the smallest edge radii are no problem for the pads (see p. 86).

As with NoCut® sleeve, use of the high-performance fibres allows the user to deploy the textile protective plate in temperatures ranging from -40 °C up to +60 °C.

NoCut® product finder
All SpanSet flat slings and round slings can be protected against sharp edges with NoCut® pad. Should you be unable to find the right pads using the table below, you can use the NoCut® product finder, which helps you to easily identify the right NoCut® product for textile lifting gear in just a few steps online (p. 87).

NoCut® pad – various NoCut® fastening elements

Different designs


NoCut® pad offers the user three alternatives to fasten the protective plate to the lifting gear: Velcro strap **1**, Velcro strap with a frame buckle **2** or 2-piece metal buckle (frame or triple bridge) **3**.

As standard, NoCut® pad is produced in lengths from 500 mm to 1,500 mm in 250-mm increments. The maximum width of the NoCut® pads is 315 mm.



Additional attachment loop

NoCut® pad is usually used in short lengths. Additional attachment loops are available for longer versions. On request, the attachment loops **4** can be optionally supplied with all three fastening elements and for any NoCut® pad width. Ask us about it!

NoCut pad is available in inner widths of up to 315 mm and a length of 1.5 m.




NoCut pad: the combination of NoCut sleeve and fabric bridge with a fastening element.

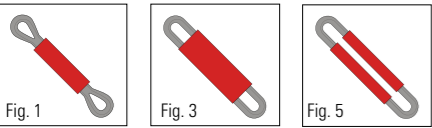

NoCut pad	Approx. inside width [mm] b	Approx. outside width [mm] a	Designation NoCut pad
with Velcro strap	45	55	NCP-055-KB
	75	85	NCP-055-KB
with Velcro strap and frame buckle	105	115	NCP-115-KR
	135	145	NCP-145-KR
	165	175	NCP-175-KR
	195	205	NCP-205-KR
	255	265	NCP-265-KR
	315	325	NCP-325-KR
with frame and triple bridge buckle	45	55	NCP-055-RD
	75	85	NCP-085-RD
	105	115	NCP-115-RD
	135	145	NCP-145-RD
	165	175	NCP-175-RD
	195	205	NCP-205-RD
	255	265	NCP-265-RD
	315	325	NCP-325-RD

Fastening elements:

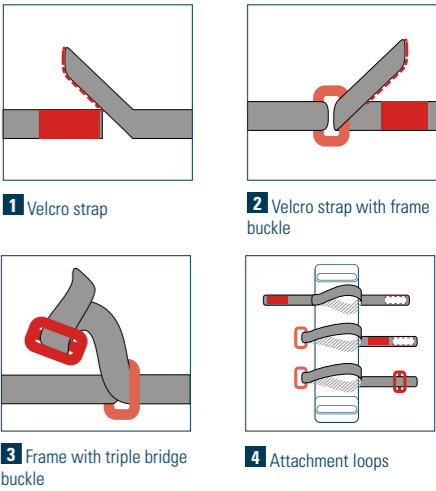

1 Protective sleeves can also be fitted by the user as shown in Fig. 1, Fig. 3 and Fig. 5. Special designs available on request.