

NoCut® sleeve

- Low dead weight
- Supple and flexible
- High cut protection due to ribbed reinforcement
- Versatile, as it can be used on both sides
- Tested and certified
- 2-ply, tear-resistant label



NoCut® sleeve – all-round cut protection for flat slings

NoCut® sleeve also offers the perfect all-round cut protection for our flat slings. Simply slipped onto the flat slings, the woven protective sleeve is positioned on the sharp edge of the load to protect the lifting gear. NoCut® sleeve can also be fitted by the user as shown in Figure 1.

Long service life and maximum safety  
NoCut® sleeve is supple and flexible, allowing the protective sleeve to be easily positioned on the load even in tight spaces. The design of the sleeve with equally high all-round cut resistance allows for a long service life, as it can be used on both sides, and offers the highest level of safety,

as application errors are excluded. NoCut® sleeve is delivered as a prefabricated cut with trimmed edges. The protective sleeves are offered at lengths in 250-mm increments as standard.

More about NoCut®  
For more information about NoCut® sleeve and the product finder, see page 80. The possible combinations can be easily defined online in just a few steps.

NoCut sleeve suitable for	Designation NoCut sleeve	Approx. inside width [mm]	Approx. outside width [mm]	Approx. thickness [mm]	Approx. weight per running m [kg]	PowerStar CS, 4-ply	PowerStar B, 2-ply	Liftoff Flat sling
1.000	NCS-045	45	55	13	0,4		✓	✓
2.000	NCS-075	75	85	13	0,6	✓	✓	✓
3.000	NCS-105	105	115	13	0,8		✓	✓
4.000	NCS-105	105	115	13	0,8		✓	✓
	NCS-135	135	145	13	1,1	✓		
5.000	NCS-165	165	175	13	1,4		✓	✓
6.000	NCS-135	135	145	13	1,1		✓	✓
	NCS-195	195	205	13	1,6	✓		
8.000	NCS-165	165	175	13	1,4		✓	✓
	NCS-255	255	265	13	2,0	✓		
10.000	NCS-195	195	205	13	1,6		✓	✓
	NCS-315	315	325	13	2,7	✓		

Special designs available on request. Protective sleeves can also be fitted by the user as shown in Fig. 1.

Unique ribbed structure of NoCut sleeve with equally high all-round cut resistance.





Fig. 1

NoCut® pad

- Perfect for use with sharp edges
- Very low dead weight
- Flexible construction
- High operational safety due to tested quality
- High cut resistance
- Sewn label with handling instructions



NoCut® pad – protective plates against the „sharp edge“

NoCut® pad is comprised of NoCut® sleeve and an internal fabric bridge that has fastening elements on both ends. NoCut® pad offers the user three alternatives to fasten the protective plate to the lifting gear: Velcro strap **1**, Velcro strap with a frame buckle **2** or 2-piece metal buckle (frame or triple bridge) **3**.


NoCut® pad is mounted there where the lifting gear lies flat against the sharp edge. The size of the edge protection can be exactly dimensioned for the danger area and precisely positioned on the sharp edge – this saves costs and increases safety at the same time.

NoCut® pad is offered as a 2-layer or 4-layer design. The 4-layer design offers an exceedingly high level of cut protection, which is why NoCut® pad is also ideal for critical lifting procedures with even the smallest radii.



Use of the HMPE material allows the user to use the textile protective plate in temperatures ranging from -40 °C up to +60 °C. As standard, NoCut® pad is produced in lengths from 500 mm to 1,500 mm in 250-mm increments. Although NoCut® pads normally come in short lengths, there are additional attachment loops available for the longer variants.

NoCut® product finder

All SpanSet flat slings straps and round slings can be protected against sharp edges with NoCut® pad. The NoCut® product finder **5**, which can be used to easily identify the right NoCut® product for textile lifting gear in just a few steps online, can help you to select the rights pads for your application. For more information see page 87.

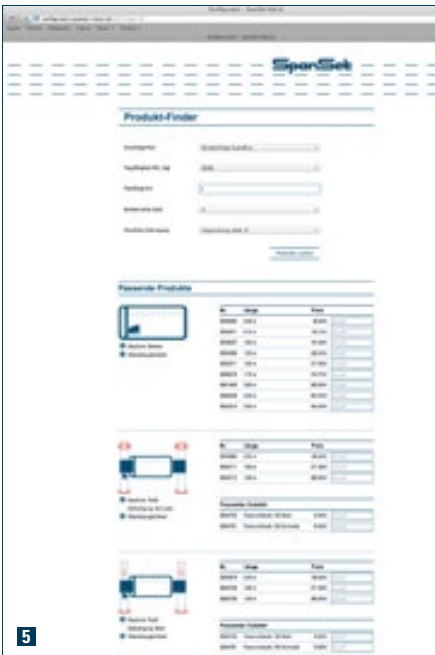

NoCut pad: the combination of NoCut sleeve and fabric bridge with a fastening element.

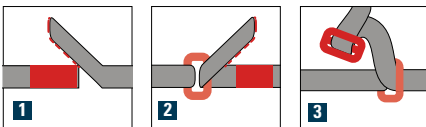

secutex SF-1

- One-sided secutex-coating
- Easy to position
- Extremely cut-resistant
- Permanent dimensional stability



secutex Clip-SC

- Can be positioned during ongoing lifting procedures
- Virtually indestructible
- Permanent dimensional stability



secutex SF-1: One contact side and the sleeve side are secutex-coated. Fig. 1





Fig. 1

secutex SF-1 – protective sleeve coating on one side

Protective sleeve coating on one side

The secutex SF-1 has been technically designed for optimal use with the SpanSet flat sling range or the SpanSet round slings. The contact side has a secutex coating, is extremely cut-resistant and reduces the formation of creases in the fabric. Easily clipped onto the textile lifting gear, the protective sleeve with the one-sided secutex coating equally protects the lifting gear and the load at „sharp edges“ and rough surfaces.

Designed for the application

secutex SF-1 is available in different surface finishes (page 17), such as „ground“, whose surface is slightly roughened. It is used whenever the contact side comes into contact with small amounts of liquids. The rough surface remains permanently slip-resistant.

If necessary, secutex SF-1 is also available with a two-sided coating in the SF-2 version, which precludes application errors when lifting sharp-edged loads. More on pages 90 et seq.

SF-1 suitable for	Designation SF-1	Approx. outside width [mm]	Approx. outside height [mm]	Approx. weight per running m [kg]	PowerStar CS, 4-ply	PowerStar B, 2-ply	Liftoff Flat sling
1.000	SF-1-30	55	20	0,9		✓	✓
2.000	SF-1-60	85	23	1,4		✓	✓
	SF-1-PCS 30	55	30	0,6	✓		
3.000	SF-1-90	115	25	2,2		✓	✓
4.000	SF-1-120	145	25	2,9		✓	✓
	SF-1-PCS 60	90	35	1,6	✓		
5.000	SF-1-150	175	25	3,4		✓	✓
6.000	SF-1-180	210	30	4,2		✓	✓
	SF-1-PCS 90	110	35	1,7	✓		
8.000	SF-1-240	270	35	5,5		✓	✓
	SF-1-PCS 120	145	40	2,3	✓		
10.000	SF-1-300	340	35	6,8		✓	✓

Special designs available on request. Protective sleeves can also be fitted by the user as shown in Fig. 1.

secutex Clip-SC – protective sleeve with a longitudinal opening

The secutex Clip-SC is quickly attached thanks to the mounting slot on the back. It is preferably used whenever flat slings with or without a protective sleeve are required on a case-by-case basis. Important: The Clip-SC makes for easy handling and short set-up times. The secutex protective layer can be placed softly and flexibly on the load, thereby increasing the radius at the critical edges. The leverage forces are extensively distributed and the load remains undamaged.

Optional versatility

secutex Clip-SC is available in versions with different surface finishes and with reinforcement. For more information about secutex and the different surface finishes, see page 14.

easyClip

Similar to the Clip-SC in terms of design, but with different material properties, easyClip is the budget-friendly version of the clip sleeve. For more information, ask us about it!

Clip-SC suitable for	Designation Clip-SC	Approx. outside width [mm]	Approx. outside height [mm]	Approx. weight per running m [kg]	PowerStar CS, 4-ply	PowerStar B, 2-ply	Liftoff Flat sling
1.000	SC-30	47	22	0,9		✓	✓
2.000	SC-60	85	23	1,4		✓	✓
	SC-PCS 30	55	30	0,9	✓		
3.000	SC-90	115	25	2,2		✓	✓
4.000	SC-120	145	25	2,9		✓	✓
	SC-PCS 60	90	35	2,1	✓		
5.000	SC-150	175	25	3,4		✓	✓
6.000	SC-180	210	30	4,2		✓	✓
	SC-PCS 90	110	35	2,3	✓		
8.000	SC-240	270	35	5,5		✓	✓
	SC-PCS 120	145	40	3,2	✓		
10.000	SC-300	340	35	6,8		✓	✓

Special designs available on request. Protective sleeves can also be fitted by the user as shown in Fig. 1.



One-sided secutex®-coating, sleeve open at the back for flexible use.





Fig. 1